

Investigation Report

Client: PPG Deco Polska Sp. z.o.o
ul. Kwidzyńska 8
51 – 416 Wrocław
Poland

Order-No. (Client):

Order-No. (MPA): **901 6752 000-90 /Kf/Sc**

Test Item: **Parquet sample sealed and finished with „DOMALUX Classic Silver Połysk“**

Specification Applied: DIN V 18032-2:2001-04

Date of Receipt of Test Item 12-08-2008

Date of Test: 12-04-2008

Date of Report: 07-31-2009

Page 1 of 3 text pages

Enclosures :

Supplements:

Total Number of Pages: 3

Number of Reports: 1 x PPG (original)

The test results relate only to the items tested.

Publication of this report in full or partly is only allowed with written authorization by MPA University of Stuttgart.

1 Purpose of investigation

You commissioned us to test the sliding properties of a parquet sample sealed and finished with „DOMALUX Classic Silver Polysk“ according to DIN V 18032-2:2001-04.

2 Testing procedure

The test was carried out according DIN V 18032-2:2001-04.

The procedure applied is accredited according to DIN EN ISO/IEC 17025:2005 (DAR-registration-no. DAP-PL-2907.07).

Testing conditions: 23/50-2 according to DIN 50014.

3 Test results

The following test results were obtained.

Table 1: Test results

testing spot no.	sliding coefficient μ
1	0,44
2	0,42
3	0,42
4	0,43
5	0,43

4 Evaluation

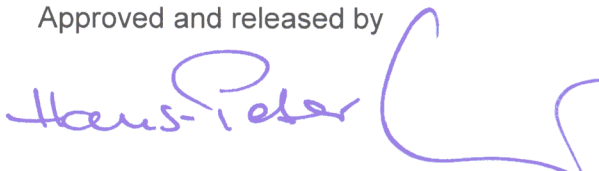
Regarding the sliding properties the parquet sample sealed and finished with „DOMALUX Classic Silver Polysk” came within the limits μ min. 0,4; μ max. 0,6, laid down in DIN V 18032-2:2001-04.

Prepared by


Johannes Schmid
Tester



Approved and released by


Dipl.-Ing. Hans-Peter Knauf
Section leader